

# Basic CV 4,8W

SLC


Scandinavian  
Lighting Concept



- Low wattage LED-strip; 4,8W/m
- Suitable for visual decorative effects
- Can be used as background light on walls, inside shelves and niches
- 3Ms adhesive tape on the backside of the strips ensures easy and quick installation
- Wide range of colour temperature and IP-rating

**Diodes:** 60 LED's pr. meter  
**Cutting point:** Every 6. diode's (10 cm)  
**Connection:** 2 meter cable on each end  
**Max length:** 5 meter (each connection)  
**Voltage:** 24 VDC

**Colour Rendering:** CRI >80  
**MacAdam:** 3  
**Beam angle:** 120°  
**Operating temperature:** -10°C ~ +45°C  
**Expected lifetime:** 60 000 hours (L80B10)\*

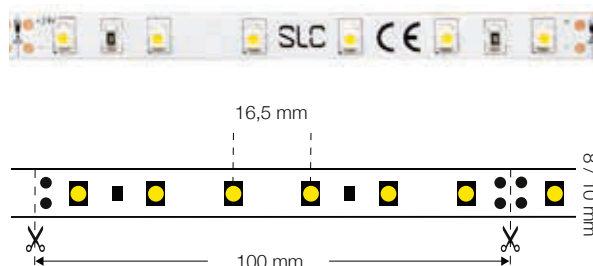

| Art.no. | Colour temp. | Lumen    | Wattage | IP-grade | Length | Width | Height |
|---------|--------------|----------|---------|----------|--------|-------|--------|
| S10001  | 2700K        | 400 lm/m | 4,8W/m  | IP20     | 5 m    | 8 mm  | 2 mm   |
| S10002  | 3000K        | 410 lm/m | 4,8W/m  | IP20     | 5 m    | 8 mm  | 2 mm   |
| S10003  | 4000K        | 420 lm/m | 4,8W/m  | IP20     | 5 m    | 8 mm  | 2 mm   |
| S10004  | 2700K        | 370 lm/m | 4,8W/m  | IP54     | 5 m    | 8 mm  | 2,5 mm |
| S10005  | 3000K        | 380 lm/m | 4,8W/m  | IP54     | 5 m    | 8 mm  | 2,5 mm |
| S10006  | 4000K        | 390 lm/m | 4,8W/m  | IP54     | 5 m    | 8 mm  | 2,5 mm |
| S10007  | 2700K        | 370 lm/m | 4,8W/m  | IP67     | 5 m    | 10 mm | 4 mm   |
| S10008  | 3000K        | 380 lm/m | 4,8W/m  | IP67     | 5 m    | 10 mm | 4 mm   |
| S10009  | 4000K        | 390 lm/m | 4,8W/m  | IP67     | 5 m    | 10 mm | 4 mm   |

\* Expected lifetime, Blue/Green/Red: 50 000 hours (L70B50)

