

**TWO-SIDED EMERGENCY EXIT SIGNS**

**TWINS**

**MATERIALS:**

Silver or black aluminium body  
Plexi glass

**MOUNTING:**

Surface (ceiling, wall)  
Optional assembly on rope sling using the bracket

**POWER SUPPLY:**

Self contained – 230VAC/50÷60Hz  
Central battery – 220÷240VAC/50÷60Hz; 216VDC  
Central battery FZLV – 24VDC

**LIGHT SOURCE:**

1,2W LED  
8W fluorescent lamp

**CHARGING:**

Maximum 24h

**AUTONOMY AND BATTERIES:**

1h, 2h, 3h, Ni-Cd batteries

**INSULATION CLASS:**

I

**IP RATING:**

IP41

**VIEWING DISTANCE:**

30m

**AMBIENT TEMPERATURE:**

t<sub>a</sub>: 0°C÷40°C

**OPTIONS:**

SE – non maintained  
SA – maintained  
PT – manual test button  
AT – autotest  
RS – Rubic central monitoring  
FZLV – central battery FZLV 24V  
CB – central battery

**ADDITIONAL INFORMATION:**

LED indicator signalizes mains power supply and battery charge  
Deep discharge protection  
III class insulation of FZLV system

**SELF CONTAINED CONFIGURATION**

CODE	POWER [W]		AUTONOMY [h]			MODE		OPTION		
TW	1,2	8	1	2	3	SE	SA	PT	AT	RS
TWB	1,2	8	1	2	3	SE	SA	PT	AT	RS

**CENTRAL BATTERY CONFIGURATION**



CODE	POWER [W]	SYSTEM	OPTION			
TW	1,2	8	CB	CBS	ADS	ADL
TWB	1,2	8	CB	CBS	ADS	ADL

**FZLV SYSTEM CONFIGURATION**

CODE	POWER [W]	SYSTEM
TW	1,2	FZLV
TWB	1,2	FZLV

**Legend:**

SE – non maintained  
SA – maintained  
PT – manual test button  
AT – autotest  
RS – Rubic central monitoring  
FZLV – fixture for central battery FZLV 24 VDC  
CB – central battery  
CBS – central battery (circuit monitoring)  
ADS – central battery with address module ADS 20  
ADL – central battery with address module ADL  
TW – fixture Twins  
TWB – fixture Twins black

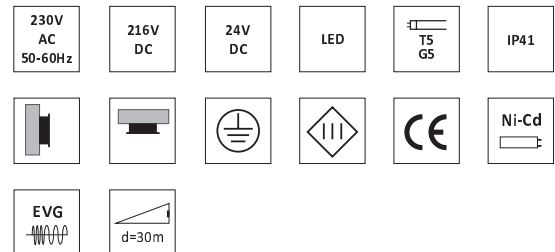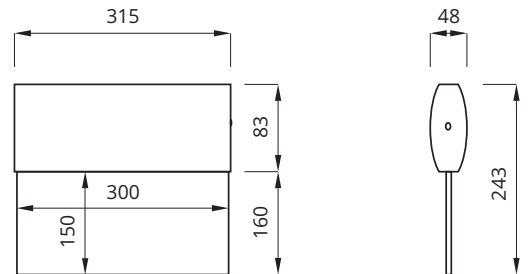

\*see pictogram

\*Emergency exit sign fixtures do not include any pictogram in the set. Pictograms have to be chosen and ordered as a separate item.