



477423EX

SPINA MOBILE DIRITTA 3P+N+T 16A 400V 50/60Hz 6h IP66



Product data

Code ELECTROCOD:	2300
Series:	CEE-Ex
Min order quantity:	1
EAN code:	8014950009664
Weight:	0,248 KG

Reference standards and guidelines

Reference Standards:	EN 60529: 1997 + A1: 2000
	EN 50014: 1997 + A1: 1999 + A2: 1999
	EN 60079-15: 2003
	EN 50281-1-1: 1998 + EC: 1999 + A1: 2002
	EN 1127-1: 1997
	EN 60309-1: 2000 + A1: 2008
	EN 60309-2: 2000 + A1: 2008
	IEC 60079-0: 2004

Marks:




Attachments

Dimensional (format .PNG):

Technical data

ATEX application zone:	Zona/Zone 2 and 22
Frequency:	50-60Hz
Atex Dust Class:	II 3D Ex tc IIIC T80°C Dc IP66
Atex Gas Class:	II 3G Ex nA IIC T6 Gc
Notified body (ATEX):	
Nominal Operating Voltage:	400V
Thread:	PG16
Protection level:	IP66
Notified body (CE):	
Customs code:	8536 69 90
Poles:	3P+N+ \perp
Clock Position:	6 h
Nominal current:	16A (3G-3D) A
Execution:	MOBILE STRAIGHT
Product Class:	PLUG
Directive:	94/9/CE 2006/95/CE 2004/108/CE

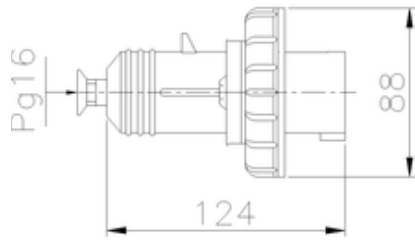

DXF Drawing:  [477223.dxf](#)