


PRODUKTDATENBLATT

13383503

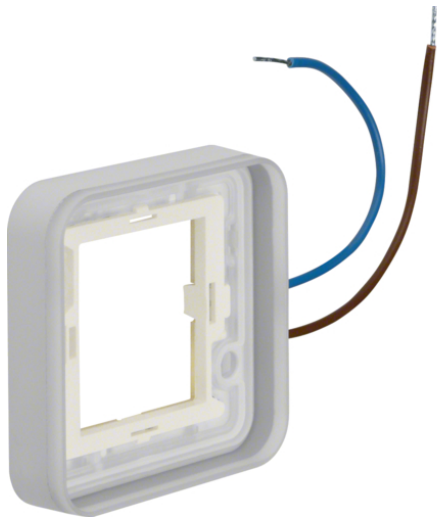

13383503

Frame 1gang, can be illuminated 12 ... 24 V, for housings surface-mounted Berker W.1, blue

Product description	Frame 1gang, can be illuminated 12 ... 24 V, for housings surface-mounted
Operating voltage	12 ... 24 V DC
Rated current	2,5/5 mA
Operating temperature	-40/30 °C
Lighting	for lighting and monitoring circuit blue
	12 ... 24 V=, 2.5 ... 5 mA
Information text	Caution! Mount only in conjunction with a surface-mounted housing.
Main design line	Berker W.1