





132WTT.8.01-R895



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent or general lighting.  
Circular design in diameter 225mm.  
Protection rating against dust and moisture: entire IP65.  
Protection rating of resistance to harmful mechanical impacts: IK07.  
High-purity anodised aluminium reflector in assorted finishes: specular or sandblasted depending on the beam angle outcome.  
5mm tempered protection glass clear as standard, other finishes under request.  
Polycarbonate diffuser as option to achieve IK10 protection degree.  
Aluminium body treated against corrosion and coated with polyester powder.  
Exterior screws and cover made of 316L stainless steel marine grade.  
Optional supply of 304 stainless steel vandal-resistant screws [reference F2.A0225+F2.A1].  
Temperature resistant silicone rubber gasket.  
Anti-condensation device.  
Remote driver, included.  
Electronic options for lighting control: DALI/ DSI.  
Passive temperature management: heat dissipation flows through aluminium heat sink.  
Mounted to the ceiling by three fixing points.

**Power:** 48 W  
**Constant Current:** 1400 mA  
**Luminous flux:** 8080lm  
**Luminous flux of the fixture:** 5333lm  
**CRI:** >80  
**Colour Temperature:** 4000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 38°  
**LOR:** 66%  
**Average Service Life:** 50000h  
**LED reliability:** 50000h L90B10  
**UGR:** 16  
**Photobiological safety group:** 1  
**Cd/Klm:** 1186  
**Luminous efficacy:** 111 lm/W  
**Imax:** 9583 Cd  
**Energy efficiency class:** A++

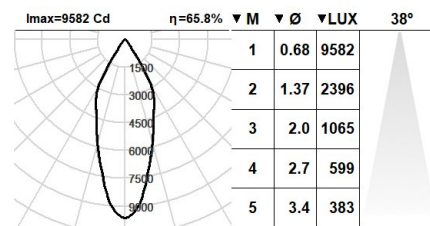

**Electronic Equipment**

**S:** On/Off  
**D:** DALI/DSI/switchDIM/corridorFUNCTION  
There are accessories available for dimming devices.  
\*Add the suffix **-S, -D** after the reference to indicate your electronic equipment choice.

**Finishes**

**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **3:** Satin Bronze, **4:** RAL7016: Anthracite Grey, **5:** RAL1036: Pearl Gold Bright, **7:** RAL9006: White Aluminium, **8:** Stainless Steel 316L: Marine grade

Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 02.11.2020]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346  
BSI Cert ISO 14001:2015 - n°EMS 55468

**ROVASI S.L.**

Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

**Contact**

T. +34 93 881 35 12 info@rovasi.com  
T. +34 93 881 37 13 www.rovasi.com