



Allround 360° Black 2700K R83 660LM CRI>95 IP44

11.03.2021

3234443



Product description

SLC Allround 360° looks just as good no matter how you adjust it. Tilts 30° in all directions (360°). Can be mounted directly in the insulation, all the way up to the moisture barrier.

SLC Allround 360° looks just as good no matter how you adjust it. Tilts 30° in all directions (360°). Can be mounted directly in the insulation, all the way up to the moisture barrier. No box installation box required. Also available as Dim-to-Warm version (1800K to 3000K).





Technical data

Suitable for built-in mounting	Yes	Suitable for wall mounting	No
Suitable for suspended mounting	No	Suitable for ceiling mounting	Yes
Adjustability	Rotating and swivelling	Lamp type	LED not exchangeable
With light source	Yes	Material housing	Aluminium
Surface protection	Powder coating	Colour housing	Black
Material cover	Glass transparent	Voltage type	AC/DC
Nominal voltage	200 - 240 V	LED nominal current at constant current	230 - 230 mA
Type of control gear	Electronic transformer	Control gear included	Yes
Dimming depending on control gear	Yes	Dimming phase cut-off	Yes
Reflector	High-gloss	Light distributor	Reflector
Light sharing	Symmetric	Beam angle	Medium beam 21-40°


Light outlet	Direct
Degree of protection (IP)	IP44
Max. system power	10 W
Colour temperature	2700 - 2700 K
Luminous flux	660 - 660 lm
Lamp efficacy	66 lm/W
Width	96 mm
Length	96 mm
Built-in width	83 mm
Built-in diameter	83 mm
Number of poles	2
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Beam angle (°)	36
Rotate (°)	360
Can be installed directly into the insulation	True
Brand	SLC
HS Code	94051040

Rated life time L80/B10 at 25 °C	50000 h
Protection class	II
Colour of light	White
Colour rendering index CRI	90-100
Rated luminous flux according to IEC 62722-	660 lm
Power factor	0,95
Height/depth	86 mm
Outer diameter	96 mm
Built-in height/depth	40 mm
Type of wiring	Suitable for through wiring
Conductor cross section	1,5 mm ²
Luminaire with limited surface temperature,	Yes
Colour rendering index (CRI/Ra)	95
Tilt-able (°)	30
Operating temperature	-20°C ~ +45°C
Dimming method	Trailing edge
GTIN	7070938054560

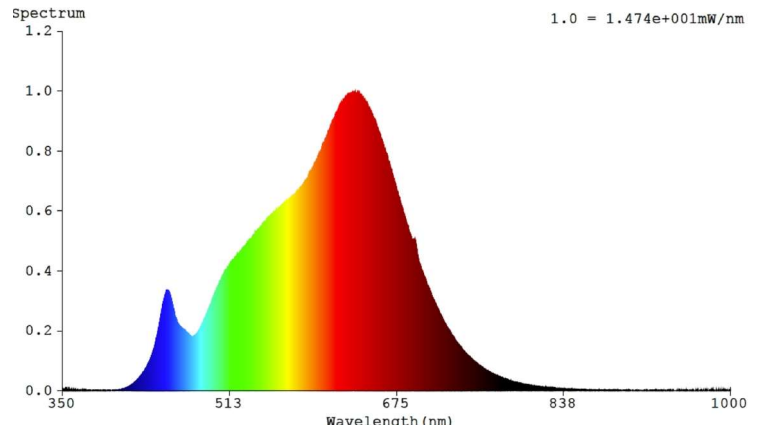




Flux 639 lm
 Maximum 1744.82 cd/klm
 Position C=270.00 G=0.00
 Efficiency: 100.00%
 Date: 10-08-2021
 Asymmetrical

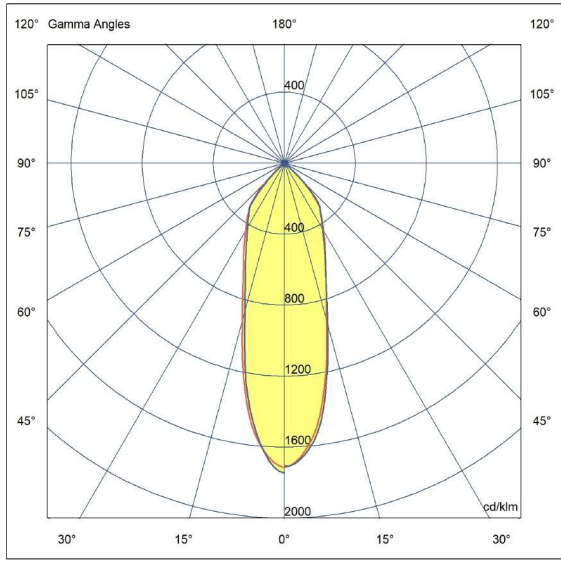

Scandinavian Lighting Concept

3234443

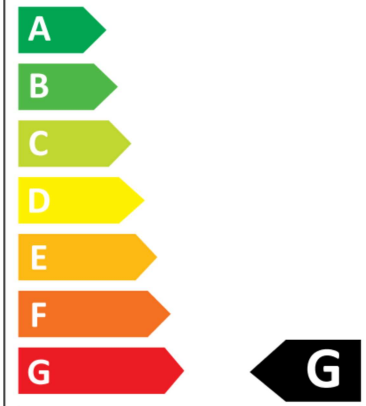

10
kWh/1000h

