



Allround 360° Ant. 2700K R83 667LM CRI>95 IP44

11.03.2021

3234455

Product description

SLC Allround 360° looks just as good no matter how you adjust it. Tilts 30° in all directions (360°). Can be mounted directly in the insulation, all the way up to the moisture barrier.

SLC Allround 360° looks just as good no matter how you adjust it. Tilts 30° in all directions (360°). Can be mounted directly in the insulation, all the way up to the moisture barrier. No box installation box required. Also available as Dim-to-Warm version (1800K to 3000K).




Technical data


Suitable for built-in mounting	Yes	Suitable for wall mounting	No
Suitable for suspended mounting	No	Suitable for ceiling mounting	Yes
Adjustability	Rotating and swivelling	Lamp type	LED not exchangeable
With light source	Yes	Material housing	Aluminium
Surface protection	Powder coating	Colour housing	Anthracite
Material cover	Glass transparent	Voltage type	AC/DC
Nominal voltage	200 - 240 V	LED nominal current at constant current	230 - 230 mA
Type of control gear	Electronic transformer	Control gear included	Yes
Dimming depending on control gear	Yes	Dimming phase cut-off	Yes
Reflector	High-gloss	Light distributor	Reflector
Light sharing	Symmetric	Beam angle	Medium beam 21-40°




Light outlet	Direct
Degree of protection (IP)	IP44
Max. system power	10 W
Colour temperature	2700 - 2700 K
Luminous flux	667 - 667 lm
Lamp efficacy	67 lm/W
Width	96 mm
Length	96 mm
Built-in width	83 mm
Built-in diameter	83 mm
Number of poles	2
Connection type	Plug clamp
Colour consistency (McAdam ellipse)	SDCM3
Beam angle (°)	36
Rotate (°)	360
Can be installed directly into the insulation	True
Brand	Quick Install
HS Code	94051040

Rated life time L80/B10 at 25 °C	50000 h
Protection class	II
Colour of light	White
Colour rendering index CRI	90-100
Rated luminous flux according to IEC 62722-	667 lm
Power factor	0,95
Height/depth	86 mm
Outer diameter	96 mm
Built-in height/depth	40 mm
Type of wiring	Suitable for through wiring
Conductor cross section	1,5 mm ²
Luminaire with limited surface temperature,	Yes
Colour rendering index (CRI/Ra)	95
Tilt-able (°)	30
Operating temperature	-20°C ~ +45°C
Dimming method	Trailing edge
GTIN	7070938053884

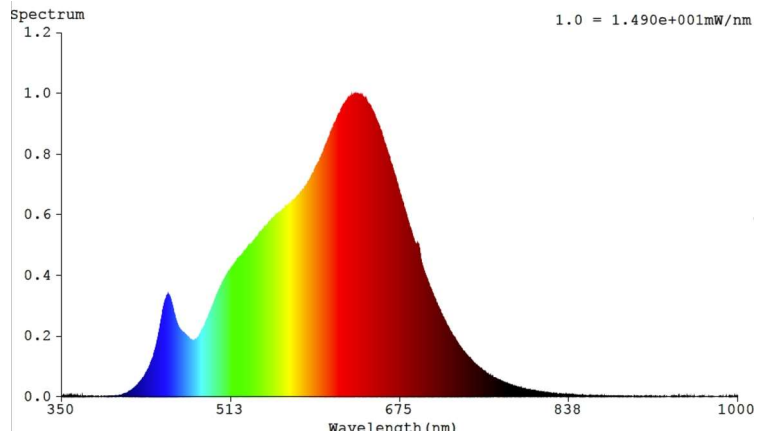




Flux 616 lm
 Maximum 1749.72 cd/klm
 Position C=270.00 G=1.00
 Efficiency: 100.00%
 Date: 10-08-2021
 Asymmetrical

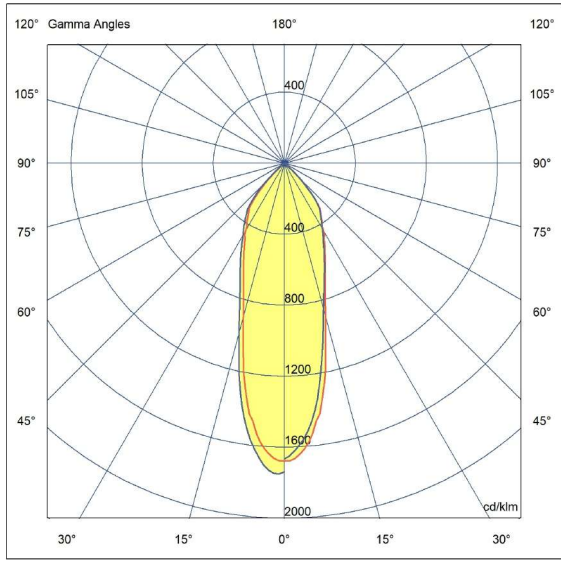

Scandinavian Lighting Concept

3234455

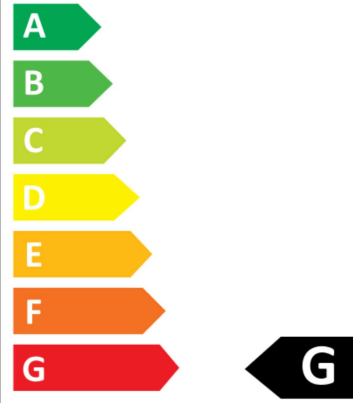

10
kWh/1000h



2019/2015