

**SLC MINIONE TILT R44 BL 3000K CRI90 IP44 100°**

23/08/2022

**SLC1203****Product description**

The SLC MiniOne Tilt in IP44 is a stylish mini-downlight with high lumen output and a wide beam angle of 100° - designed for decorative lighting. Get the Final touch on your project with SLC MiniOne. Assemble up to 6 downlights on a driver. The MiniOne Tilt can be tilted 40°. Cut out hole: 44 mm / Built-in height: 31 mm. IP44 (Front) / IP21 (Back)

**Technical data**

Suitable for built-in mounting	Yes
Adjustability	Swivelling
With light source	Yes
Surface protection	Powder coating
Voltage type	DC
LED nominal current at constant current	700 - 700 mA
Dimming depending on control gear	Yes
Light distributor	None
Beam angle	Extreme wide beam >80°
Rated life time L90/B10 at 25 °C	50000 h
Protection class	III
Colour of light	White
Colour rendering index CRI	90-100

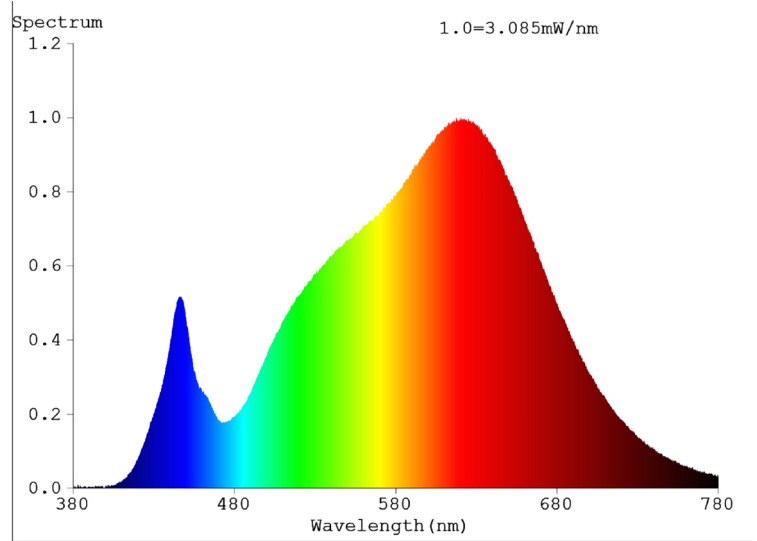
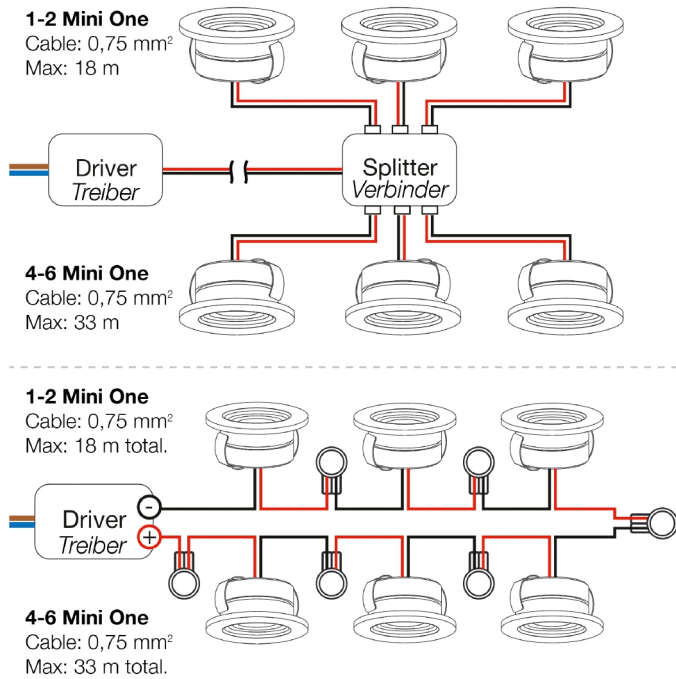
Suitable for ceiling mounting	Yes
Lamp type	LED not exchangeable
Material housing	Aluminium
Material cover	Other
Nominal voltage	3 - 18 V
Type of control gear	LED operating device current-controlled
Dimming phase cut-off	Yes
Light sharing	Symmetric
Light outlet	Direct
Degree of protection (IP)	IP44
Max. system power	3 W
Colour temperature	2700 - 2700 K
Rated luminous flux according to IEC 62722-	165 lm







Height/depth	31 mm
Built-in height/depth	29 mm
Type of wiring	Suitable for through wiring
Connection type	Plug clamp
Tilt-able (°)	40
GTIN	7070938064798

Outer diameter	50 mm
Built-in diameter	44 mm
Number of poles	2
Beam angle (°)	100
Dimming method	Trailing edge
HS Code	94051040








 **ENERG** 


Scandinavian Lighting Concept  
SLC1203


---


A 



B 

C 

D 


E 

F 

G   **G**

---

**3**  
kWh/1000h

 2019/2015

