




SLC RF/AC-PUSHDIM TO DALI DT8 RGB/RGBW CONVERTER

RF for DALI Group and Scene Controller. Controls RF wall panel / remote control and converter signal to DALI bus

Technical data	
Product ID	S21024
DALI version	DALI2
DALI Type	DT8
Number of DALI-address	1
DALI-bus power consumption	8 mA
DALI DT8 Color Management Protocol	RGBWAF
Exterior color	White
Operating temperature	0°C ~ +40°C °C
Expected lifetime (Ta 25°C)	110000 Hours
Expected lifetime (Ta 45°C)	50000 Hours
Protection class	II
Housing	Plastic housing
Degree of protection (IP)	IP20
Dimming 0-10 V	No
Dimming 1-10 V	No
Dimming DALI	Yes
Dimming DMX	No
Dimming potentiometer (integrated)	No
Dimming GPRS	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	No
Dimming phase cut-on	No
Dimming programmable	No
Dimming RF	Yes
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	Yes
No dim function	No
Dimming DSI	No

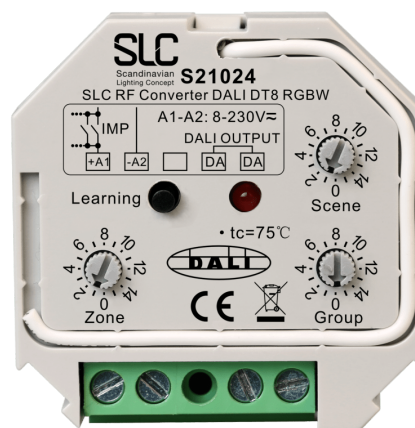

17.01.2020

Subject to changes and printing errors

Dimming method	Pulse Width Modulation (PWM)
Dimming interface	DALI DT8
Input	
Electrical connection (Input)	L`N screw connection
Output	
RGBW	Yes
RGB	Yes
Installation	
Length	46 mm
Height	20.5 mm
Width	45 mm
Model	Static
Suitable for outdoor use	No
logistics data	
Brand	SLC
Imported by	The Light Group
General data	
GTIN	7070938060271