


SLC LED DRIVER RF CC MULTI TW 50W



Dimmable CC LED Driver for Tunable White LED-Fixtures with RF communication. Can be set to different mA with DIP-switch.

Technical data	
Product ID	S32066
CE	Yes
Exterior color	White
EMC	Yes
ENEC	Yes
Flicker free	Yes
Operating temperature	-20°C ~ +45°C °C
Expected lifetime (Ta 25°C)	110000 Hours
Expected lifetime (Ta 45°C)	50000 Hours
RoHs	Yes
SELV	Yes
Tc	75 °C
Protection class	II
Housing	Plastic housing
Degree of protection (IP)	IP20
Suitable for constant current	Yes
Dimming RF	Yes
Dimming with push-button	Yes
Dimming method	Pulse Width Modulation (PWM)
Dimming interface	RF (Radio Frequency) 869,5MHz
Input	
Power factor	0.9
Strain relief	Yes
Frequency range	[50,60] Hz
Input voltage	[200,240] V
Output	
Output current	250 - 1500 mA
Output power	50 - 50 W
DIP-switch	Yes
Output type	Constant current (CC)
Max total output power	50 W
Output current per channel	[250,1500] A

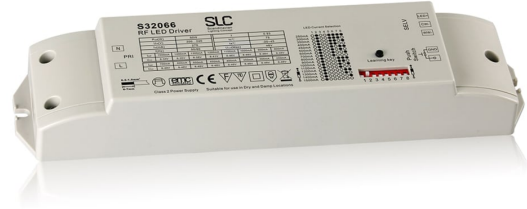

17.01.2020

Subject to changes and printing errors

Tunable White	Yes
Number of LED Output Channels	2
Output voltage	8 - 48 V
Max output current	1.5 A
Installation	
Length	210 mm
Height	32 mm
Width	50 mm
Model	Static
logistics data	
Brand	SLC
Imported by	The Light Group
General data	
GTIN	7070938057356