

SLC MiniOne DRIVER 700mA 9-18VDC

18/12/2023

SLC1210



Product description

Driver for SLC MiniOne Downlights. Minimum four and a maximum of five downlights. Works with both the SLC MiniOne Tilt and the SLC MiniOne Fixed downlights. A splitter for three to five downlights is included.

Technical data

Model	Static
Housing	Plastic housing
Output voltage	9 - 18 Volt
Output power	6,3 - 12 Watt
Protection class	II
Width	40 Millimetre
Output type	Constant current (CC)
Input voltage (V)	220 - 240
Power factor	0,95
Color	White
Tc (°C)	80
Control gear	Trailing edge
Produced by	The Light Group


Dimming phase cut-off	Yes
Suitable for constant current	Yes
Output current	700 - 700 Milliampere
Degree of protection (IP)	IP20
Length	109 Millimetre
Height	22 Millimetre
Mono	Yes
Frequency range (Hz)	50 - 60
Inrush Current (A)	5
Operating temperature	-20°C ~ +45°C
Dimming method	Trailing edge
Brand	SLC





1-2 Mini One

Cable: 0,75 mm²
Max: 18 m

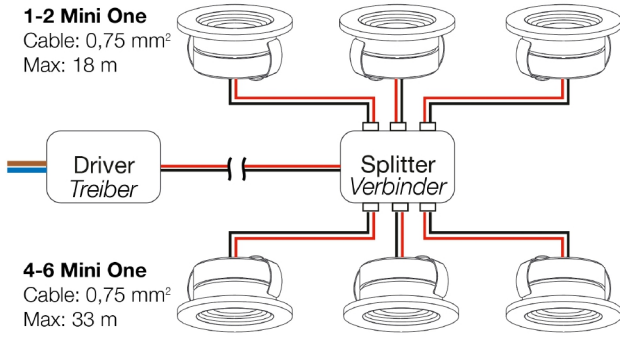


4-6 Mini One

Cable: 0,75 mm²
Max: 33 m



1-2 Mini One

Cable: 0,75 mm²
Max: 18 m total.

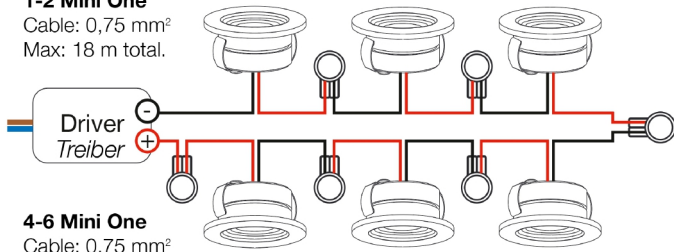

4-6 Mini One

Cable: 0,75 mm²
Max: 33 m total.

