

Shield connection terminal block - SK 14 - 3025176

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Shield connection clamp, for shield on busbars, contact resistance < 1 mOhm

Why buy this product

- Easy handling
- Spring-loaded, large-surface pressure plate
- Suitable for direct and busbar mounting
- Knurled screw



Key commercial data

| | |
|--------------------------------------|---|
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| GTIN |  4 017918 130305 |
| Weight per Piece (excluding packing) | 20.4 g |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

Technical data

General

| | |
|-----------------------|--------|
| Number of levels | 1 |
| Number of connections | 1 |
| Color | silver |

Dimensions

| | |
|--------|----------|
| Length | 19.5 mm |
| Width | 17 mm |
| Height | 59.30 mm |

Connection data

| | |
|-----------------------|--------|
| Screw thread | M4 |
| Tightening torque max | 0.8 Nm |

Shield connection terminal block - SK 14 - 3025176

Technical data

Connection data

| | |
|-------------------|-------------|
| Connection method | Screwing on |
|-------------------|-------------|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27141131 |
| eCl@ss 4.1 | 27141131 |
| eCl@ss 5.0 | 27141131 |
| eCl@ss 5.1 | 27141131 |
| eCl@ss 6.0 | 27141150 |
| eCl@ss 7.0 | 27141150 |
| eCl@ss 8.0 | 27141150 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC002020 |
| ETIM 5.0 | EC002020 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Approval details

Shield connection terminal block - SK 14 - 3025176

Approvals

EAC

Accessories

Accessories

Installation terminal block

Connection terminal block - AKG 4 GNYE - 0421029



Connection terminal block, Connection method Screw connection, Load current : 41 A, Cross section: 0.5 mm² - 6 mm², Width: 7 mm, Color: green-yellow

Connection terminal block - AKG 4 BK - 0421032



Connection terminal block, Connection method Screw connection, Load current : 41 A, Cross section: 0.5 mm² - 6 mm², Width: 7 mm, Color: black

Neutral conductor rail

Neutral busbar - NLS-CU 3/10 SN 1000MM - 0402174



PEN conductor busbar, 3mm x 10 mm, length: 1000 mm

Pick-off terminal block

Connection terminal block - AK 4 - 0404017



Connection terminal block, Connection method Screw connection, Load current : 41 A, Cross section: 0.5 mm² - 6 mm², Width: 7 mm, Color: silver

Support

Shield connection terminal block - SK 14 - 3025176

Accessories

Support bracket - AB-SK - 3025341

Support bracket for busbars




Support bracket - AB/SS - 0404428




Support bracket made from insulation material, with retaining screw, can be used with either 3 x 10 mm or 6 x 6 mm busbar, color: gray

Drawings

Dimensioned drawing



Dimensioned drawing

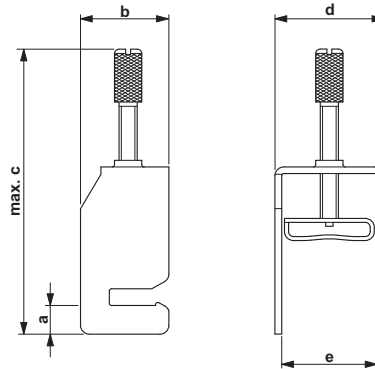

Shield connection terminal block - SK 14 - 3025176

Diagram

