



SLC LED-PANEL R600 BASE 3200LM TUNEABLE WHITE 36W O

12/04/2024

SLC8711

Product description

LED-panel with dimmable light - and adjustable CCT

Dimmable light - and adjustable CCT
Light color 3000 - 6500K
2x800mA driver (not included).

Technical data


Suitable for suspended mounting	Yes	Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes	Suitable for surface mounting	Yes
Lamp type	LED not exchangeable	With light source	Yes
Lamp holder	Other	Housing material	Aluminium
Housing colour	White	Material cover	Plastic, structured
Type of grid	Matt	Voltage type	DC
Nominal voltage	8 - 48 Volt	Type of control gear	LED operating device current-controlled
With control gear	No	Light distributor	Diffuser lens/optic/panel
Light sharing	Symmetric	Beam angle	Open beam/diffuse
Light outlet	Direct	Rated life time L70/B50 at 25 °C	50000 Hour
Degree of protection (IP)	IP20	Protection class	III
Rated ambient temperature according to IEC	-10 - 40 Degrees celsius	Suitable for lamp power	36 - 36 Watt
Max. system power	36 Watt	Luminaire efficacy	89 Lumen/Watt
Rated luminous flux according to IEC 62722-	3200 Lumen	Colour of light	White





Colour temperature	3000 - 6500 Kelvin
Power factor	0,9
Height/depth	8 Millimetre
Built-in length	600 Millimetre
Built-in height/depth	8 Millimetre
Number of poles	3
Brand	SLC
Produced by	The Light Group

Colour rendering index CRI	80-89
Width	600 Millimetre
Length	600 Millimetre
Built-in width	600 Millimetre
Type of wiring	Suitable for through wiring
Connection type	Push-in clamp
GTIN	7070938059596

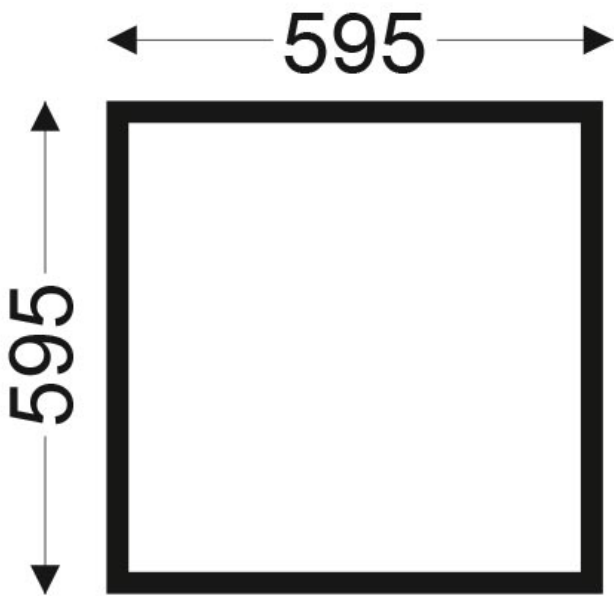




| The Light Group || SLC8711



This luminaire contains built-in LED lamps.

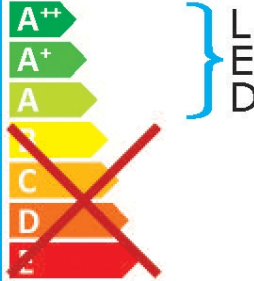

The lamps cannot be changed in the luminaire.

874/2012

