
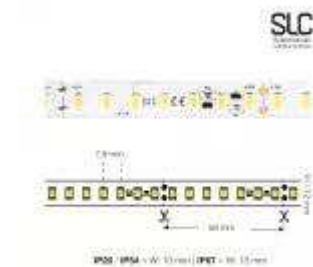


IP20 / IP54 = W: 10 mm | IP67 = W: 12 mm



LED-STRIP HO 4000K CC 15W/m 5m 24VDC CRI>80 IP67

Professional LED-strip with constant current and high efficiency. Perfect for bigger projects, where light output is important

DESCRIPTION

ADDITIONAL INFORMATION

Product Type *LED-STRIP*

Power Supply *Constant Current*

Input *24VDC*



Lumen/m	<i>1560 lm/m</i>
Lenght	<i>5m</i>
Height	<i>4mm</i>
Width	<i>12mm</i>
LED`s pr. meter	<i>126 LED`s pr. meter</i>
Cutting point	<i>56mm</i>
Chip	<i>SMD Chip 2835 Epistar</i>
Colour Toleranse	<i>MacAdam 3</i>
Protection	<i>IP67</i>
Expected Lifetime	<i>60000 Hours (L80B10)</i>
Operating temperature:	<i>-10°C – +45°C</i>
Connection	<i>2m wire at both ends</i>

Related products




MONO (WHITE)

LED-STRIP BASIC
3000K CV 4.8W/m 5m
24VDC CRI>80 IP54

Low wattage LED-strip;
4,8W/m. Suitable for visual
decorative effects



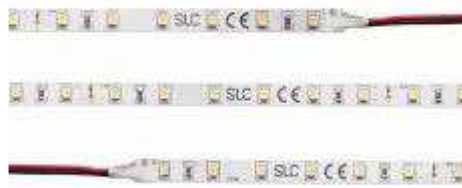

MONO (WHITE)

LED-STRIP BASIC
2700K CV 4.8W/m 5m
24VDC CRI>80 IP20


Low wattage LED-strip;
4,8W/m. Suitable for visual
decorative effects



MONO (WHITE)

LED-STRIP STANDARD
3000K CV 9.6W/m 30m
24VDC CRI>80 IP20

Standard Constant Voltage
LED-strip with very good light
output and low power

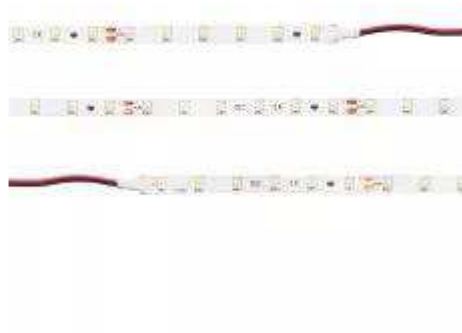

MONO (WHITE)

LED-STRIP BASIC
3000K CC 4.32W/m
30m 24VDC CRI>80
IP20

Low wattage Constant Current
LED-strip for long stretches of
continues decorative lighting





[DELIVERY AND PAYMENT](#)

[GF-DESIGN](#)

[HANDLEKURV](#)

[HOME](#)

[INSPIRATION](#)

[LED-STRIPS IN BATHROOM](#)

[LED-STRIPS IN HALLWAY](#)

[LED-STRIPS IN KITCHEN](#)

[LED-STRIPS IN LIVING ROOM](#)

[LED-STRIPS IN OFFICE](#)

[MIN KONTO](#)

[OUR BRANDS](#)

[PRODUCTS](#)

[QUICK INSTALL](#)

[SIGN UP](#)

[SIGN UP – GERMAN](#)

[SLC](#)

[SLC LOGIQ](#)

[TESTSIDE](#)

[TIL KASSEN](#)

Hestia | Developed by Themelsle