

Basic CC 4,3W

SLC

Scandinavian Lighting Concept




- Low wattage strip, 4,3W/m
- Suitable for visual decorative and accentual effects
- Good solution as for instance background light on walls, inside of shelves and niches
- Constant Current technology protects each LED diode against voltage drop and gives more uniform light on long distances
- 3Ms adhesive tape on the backside of the strips ensures easy and quick installation
- Available in many lengths, colour temperatures and IP-rating options



Diodes: 60 LED pr. meter
Cutting point: Every 6. diode's (10 cm)
Connection: 2 meter cable on each end
Max length: 20 meter
Voltage: 24 VDC

Colour Rendering: CRI >80
MacAdam: 3
Beam angle: 120°
Operating temperature: -10°C ~ +45°C
Expected lifetime: 60 000 hours (L80B10)

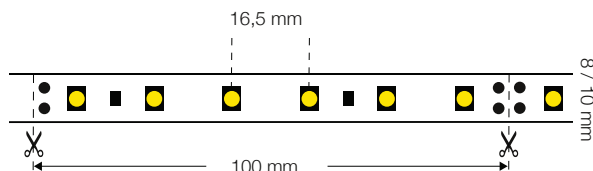

Art.no.	Colour temp.	Lumen	Wattage	IP-grade	Length	Width	Height
S10020	2700K	350 lm/m	4,3W/m	IP20	10 m*	8 mm	2 mm
S10021	3000K	360 lm/m	4,3W/m	IP20	10 m*	8 mm	2 mm
S10022	4000K	370 lm/m	4,3W/m	IP20	10 m	8 mm	2 mm
S10023	2700K	320 lm/m	4,3W/m	IP54	10 m	8 mm	2,5 mm
S10024	3000K	330 lm/m	4,3W/m	IP54	10 m	8 mm	2,5 mm
S10025	4000K	340 lm/m	4,3W/m	IP54	10 m	8 mm	2,5 mm
S10026	2700K	320 lm/m	4,3W/m	IP67	10 m	10 mm	4 mm
S10027	3000K	330 lm/m	4,3W/m	IP67	10 m	10 mm	4 mm
S10028	4000K	340 lm/m	4,3W/m	IP67	10 m	10 mm	4 mm
S10901	2700K	350 lm/m	4,3W/m	IP20	30 m	8 mm	2 mm
S10902	3000K	360 lm/m	4,3W/m	IP20	30 m	8 mm	2 mm

