

Distribution block - PTFIX 10/6X4-SI (5X20)



1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Distribution block, fuse type: G / 5 x 20, nom. voltage: 250 V, nominal current: 6.3 A, connection method: Push-in connection, Load contact, Rated cross section: 4 mm², cross section: 0.2 mm²- 6 mm², connection method: Push-in connection, Line contact, Rated cross section: 10 mm², cross section: 0.5 mm²- 16 mm², mounting type: for snapping onto a DIN rail adapter, Direct mounting with flange, color: black

Distribution block - PTFIX 10/6X4-SI (5X20)



1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Commercial Data

Item number	1172135
Packing unit	8 pc
Minimum order quantity	8 pc
Sales Key	BEA135
Product Key	BEA135
GTIN	4063151197995
Weight per Piece (including packing)	77 g
Weight per Piece (excluding packing)	48.175 g
Customs tariff number	85369010
Country of origin	PL

Distribution block - PTFIX 10/6X4-SI (5X20)



1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Technical Data

Notes

General

Note	The current is determined by the fuse used, the voltage by the fuse or selected light indicator.
	The maximum load current of a single clamping unit must not be exceeded.
	For power distribution applications, IEC 60364-4-43:2008; modified + corrigendum Okt. 2008 (DIN VDE 0100-430:2010-10) section 433.2 ff must be observed!

Product properties

Product type	Distributor terminal block
Number of connections	7
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Fuse	G / 5 x 20
Maximum power dissipation	max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)
	max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)
	max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)

Connection data

Number of connections per level	7
---------------------------------	---

Load contact

Stripping length	10 mm ... 12 mm
Internal cylindrical gage	A4
Conductor cross section solid	0.2 mm ² ... 6 mm ²
Cross section AWG	24 ... 10
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	24 ... 12
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.2 mm ² ... 0.4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.2 mm ² ... 4 mm ²
2 conductors with the same cross section, flexible, with TWIN	0.5 mm ² ... 1 mm ²

Distribution block - PTFIX 10/6X4-SI (5X20)



1172135

<https://www.phoenixcontact.com/gb/products/1172135>

ferrule with plastic sleeve	
Nominal current	6.3 A (the current is determined by the fuse used)
Maximum load current	6.3 A (with 4 mm ² conductor cross section)
Maximum total current	37.8 A (The maximum load current of the individual terminal point must not be exceeded.)
Nominal voltage	250 V (the voltage is determined by the fuse used)
Nominal cross section	4 mm ²

Line contact

Stripping length	12 mm ... 14 mm
Conductor cross section solid	0.5 mm ² ... 16 mm ²
Cross section AWG	20 ... 6
Conductor cross section flexible	0.5 mm ² ... 10 mm ²
Conductor cross section, flexible [AWG]	20 ... 8
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.5 mm ² ... 10 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 10 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 4 mm ²
Nominal current	37.8 A
Maximum load current	37.8 A (with 10 mm ² conductor cross section)
Maximum total current	The maximum load current of the individual terminal point must not be exceeded.
Nominal cross section	10 mm ²

Load contact Connection cross sections directly pluggable

Conductor cross section solid	0.5 mm ² ... 6 mm ²
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.5 mm ² ... 4 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm ² ... 4 mm ²

Line contact Connection cross sections directly pluggable

Conductor cross section solid	1.5 mm ² ... 10 mm ²
Conductor cross section, solid [AWG]	16 ... 8
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	1.5 mm ² ... 10 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	1.5 mm ² ... 10 mm ²

Dimensions

Width	87.8 mm
Height	35.4 mm
Length	28.6 mm

Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I

Distribution block - PTFIX 10/6X4-SI (5X20)



1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s ²)/Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C

Distribution block - PTFIX 10/6X4-SI (5X20)



1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Permissible humidity (storage/transport)	30 % ... 70 %
--	---------------

Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
	IEC 60947-7-3

Mounting

Mounting type	for snapping onto a DIN rail adapter
	Direct mounting with flange

Distribution block - PTFIX 10/6X4-SI (5X20)




1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Drawings

Circuit diagram

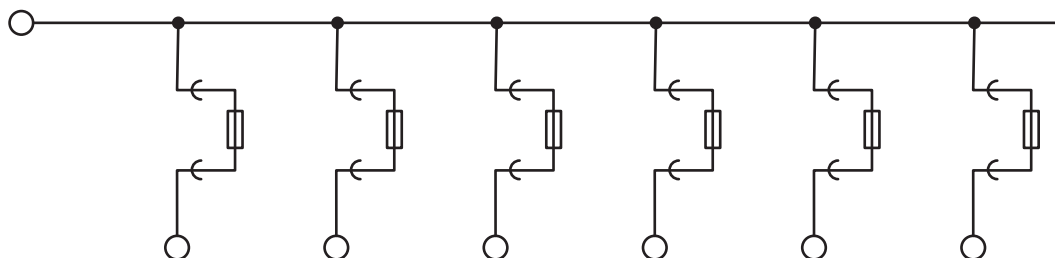


Distribution block - PTFIX 10/6X4-SI (5X20)




1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Approvals

 CSA Approval ID: 13631				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B				
Output	300 V	6.3 A	24 - 10	-
Input	300 V	40 A	20 - 8	-

 IECEE CB Scheme Approval ID: NL-77613				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	500 V		-	-

 cULus Recognized Approval ID: E60425				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Use group B				
Output	300 V	6.3 A	24 - 10	-
Input	300 V	40 A	20 - 8	-
Use group F				
Output	250 V	6.3 A	24 - 10	-
Input	250 V	40 A	20 - 8	-

 KEMA-KEUR Approval ID: 71-121479				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	500 V		-	-

Distribution block - PTFIX 10/6X4-SI (5X20)



1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Classifications

ECLASS

ECLASS-11.0

27141116

ETIM

ETIM 8.0

EC000899

UNSPSC

UNSPSC 21.0

39121400

Distribution block - PTFIX 10/6X4-SI (5X20)



1172135

<https://www.phoenixcontact.com/gb/products/1172135>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

Phoenix Contact 2022 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
Halesfield 13, Telford
Shropshire, TF7 4PG
01952 681700
info@phoenixcontact.co.uk